


# TECHNICAL DATA SHEET

**DGY12-60DEV**

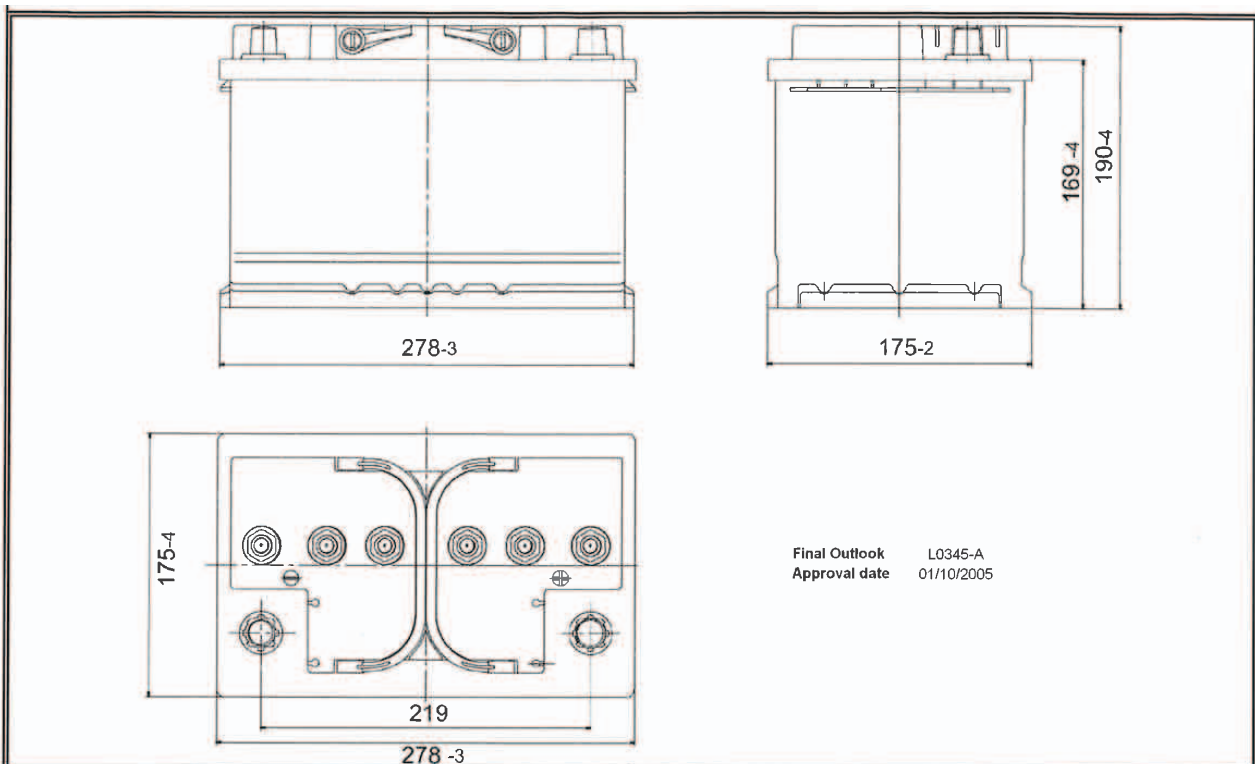

## PERFORMANCES

Voltage (V):	12 V	
C20 (Ah):	56.0	20 h
Rc (min):	0	
Cranking (A):	460	EN
Vibration:	V3 (35Hz/6g/20h)	
Endurance:	250 cycles@100%	
Charge:	CHARGED	
Technology:	GEL	
Grid:	Ca/Ca	

## WEIGHT AND STD. DIMENSIONS

Battery Weight (kg $\pm$ 5%):	20.8
Volume acid (l $\pm$ 5%):	.0
Length (mm $\pm$ 2):	278
Width (mm $\pm$ 2):	175
Height (mm $\pm$ 2):	190

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

## CONTAINER

Type:	L03	BLACK
Hold Down:	B13	
H.D. Adapter:	No	

## COVER

Type:	DIN	BLACK
Polarity:	ETN 0	
Terminals:	EN taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Independent	
Filter:	No	
Lateral Plug:	No	

## PLUGS

Type:	6 x Valve+Cover	GREY MEDIUM
-------	-----------------	-------------

## HANDLES

Type:	2 x Integrated	BLACK
-------	----------------	-------

## OTHERS

Degassing Tube:	No
-----------------	----