


# TECHNICAL DATA SHEET

**DCY12-80DEV**

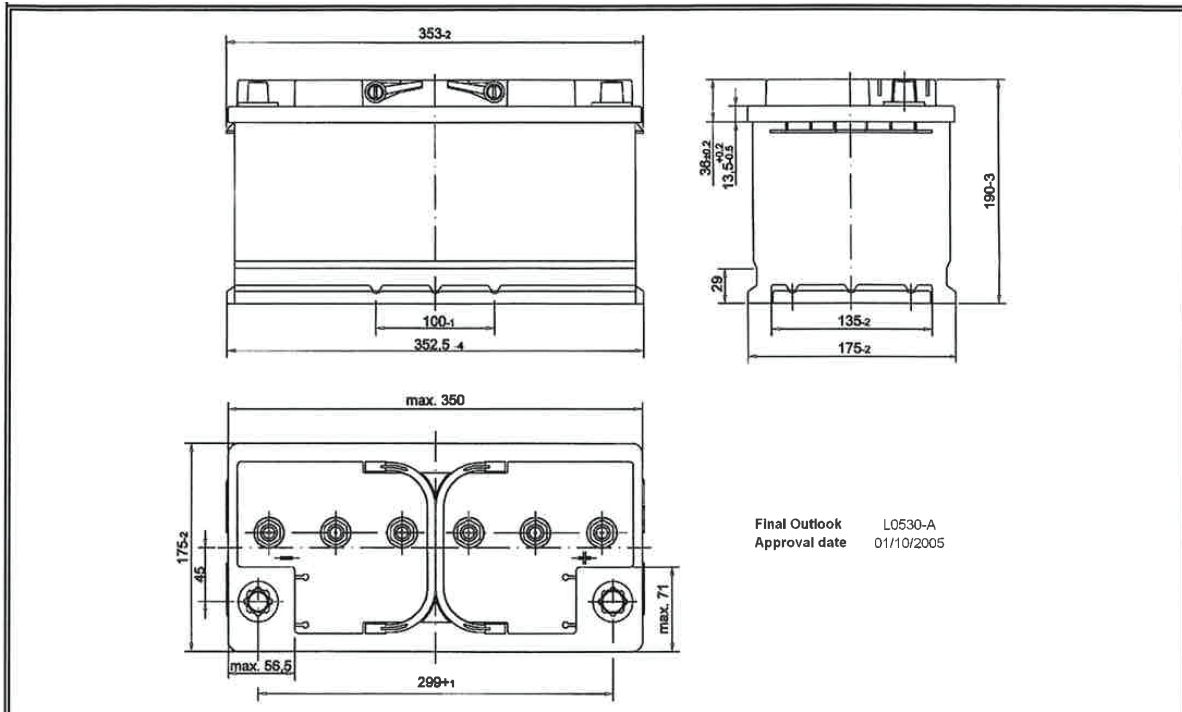

Final Outlook L0530-A  
Approval date 01/10/2005

PERFORMANCES		CONTAINER	
Voltage (V):	12 V	Type:	L05 BLACK
C20 (Ah):	80.0 20 h	Hold Down:	B13
Rc (min):	0	H.D. Adapter:	No
Cranking (A):	540 EN	<b>COVER</b>	
Vibration:	V3 (35Hz/6g/20h)	Type:	DIN BLACK
Endurance:	250 cycles@100%	Polarity:	ETN 0
Charge:	CHARGED	Terminals:	EN taper post
Technology:	GEL	Terminal Adapter:	No
Grid:	Ca/Ca	SOCI:	No
<b>WEIGHT AND STD. DIMENSIONS</b>		Ventilation:	Independent
Battery Weight (kg ± 5%):	26.8	Filter:	No
Volume acid (l ± 5%):	.0	Lateral Plug:	No
Length (mm ± 2):	353	<b>PLUGS</b>	
Width (mm ± 2):	175	Type:	6 x M18 Valve GREY MEDIUM
Height (mm ± 2):	190	<b>HANDLES</b>	
All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.		Type:	2 x Integrated BLACK
		<b>OTHERS</b>	
		Degassing Tube:	No