

TECHNICAL DATA SHEET

2PZS36L2

Applications




CYCLIC



SOLAR



MARINE

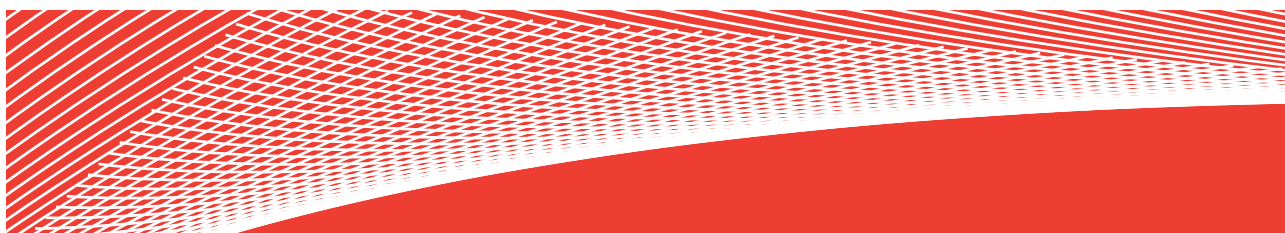

Nominal Voltage	12 V			
Nominal Capacity	20 h	⇒	50 Ah	
		5 h	⇒	36 Ah	
		2 h	⇒	28 Ah	
		1 h	⇒		
Internal Resistance	milliohms			
Dimensions (mm)	Lenght	240 mm	Width	175 mm
				Height	190 mm
Terminals	+ \ -			
Electrolyte	Sulphuric acid			
Recipient	Polypropylene (PP)			
Weight with electrolyte	14 Kg.			
Suggested Charging current	6 A			
Suggested Charging Voltage	Floating use at 20°C	13,50V - 13,80V	Cycle use at 20°C	14,80V - 14,28V
Operating Temperature	-20°C / 45°C			
Storage Temperature	-20°C / 40°C			
Cycle nr.	1200			