

# TECHNICAL DATA SHEET

## 2PZS36L2

### Applications




**CYCLIC**



**SOLAR**



**MARINE**

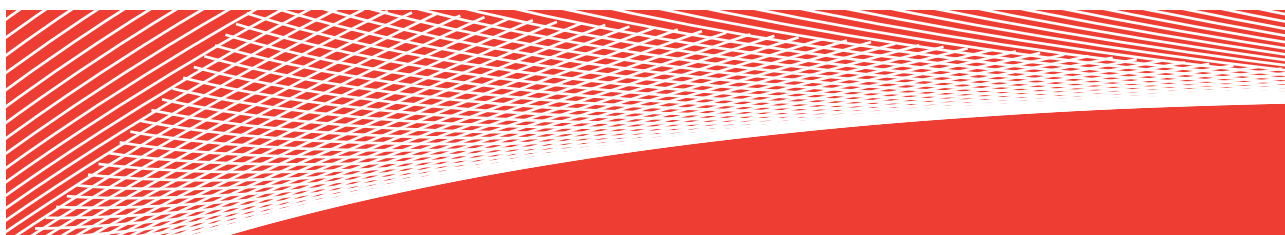

Nominal Voltage	.....	12 V			
Nominal Capacity	.....	20 h	⇒	50 Ah	
		5 h	⇒	36 Ah	
		2 h	⇒	28 Ah	
		1 h	⇒		
Internal Resistance	.....	milliohms			
Dimensions (mm)	.....	Lenght	240 mm	Width	175 mm
				Height	190 mm
Terminals	.....	+ \ -			
Electrolyte	.....	Sulphuric acid			
Recipient	.....	Polypropylene ( PP )			
Weight with electrolyte	.....	14 Kg.			
Suggested Charging current	.....	6 A			
Suggested Charging Voltage	.....	Floating use at 20°C	13,50V - 13,80V	Cycle use at 20°C	14,80V - 14,28V
Operating Temperature	.....	-20°C / 45°C			
Storage Temperature	.....	-20°C / 40°C			
Cycle nr.	.....	1200			