

# TECHNICAL DATA SHEET

9.095.2

## Applications



CYCLIC



SOLAR



MARINE

### Electrical specification

Voltage:  (V)

Capacity C20:  (Ah)

RC:  (min)

### Mechanical specification

Dimensional group:  EN50342-2:2007

DIN reference:

Sizes:  (L x W x H)

Cell Layout:

Terminal Type:

### Container

<u>Case</u>	Material	<input type="text" value="POLYPROPYLENE"/>	Colour	<input type="text" value="BLACK"/>
	Bottom hold down	<input type="text" value="B0"/>	Handles	<input type="text" value="BLACK"/>
<u>Lid</u>	Material	<input type="text" value="POLYPROPYLENE"/>	Colour	<input type="text" value="BLACK"/>
	Cover design	<input type="text" value="FLAT"/>	Handles	<input type="text" value="-"/>
<u>Vent cap</u>	Material	<input type="text" value="POLYPROPYLENE"/>	Colour	<input type="text" value="BLACK"/>
	Type	<input type="text" value="M27*3"/>		

### Test details

Vibration resistance:

Endurance resistance:


Battery weight:  ± 1.00 (Kg)

Acid weight:  ± 0.50 (Kg)

Total battery weight:  ± 1.50 (Kg)

### Charging

Suggested Charging current      25A WA 20 IU1A  
 Operating Temperature            -20°C / 45°C  
 Storage Temperature              -20°C / 40°C  
 Cycle nr.                              600

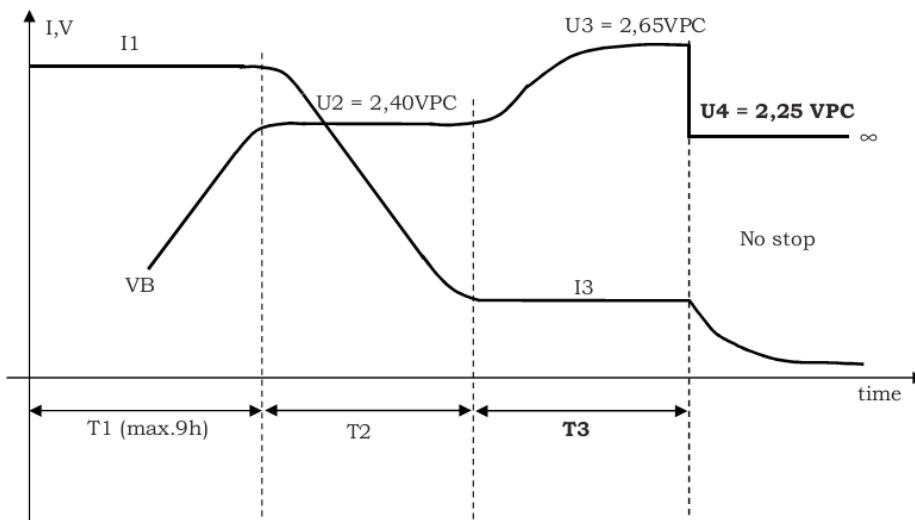

Duur: T1 + T2:      De duur van de eerste twee fases is hoogstens 14u

Duur: T3:            De duur T3 is gelijk aan de duur van de hoofdlading, dat is  $t_3 = t_1 + t_2$ ,  
 maar met een minimum van 1 tot 4h

T1 + T2 [h]	< 1	2	3	4	> 4
T3 [h]	1	2	3	4	4