

# TECHNICAL DATA SHEET

## PZS150

### Applications



**CYCLIC**







**SOLAR**



**MARINE**

Nominal Voltage..... 12 V

Nominal Capacity..... 20 h  200 Ah  
5 h  150 Ah  
2 h  117 Ah  
1 h 

Internal Resistance..... milliohms

Dimensions (mm)..... Length 510 mm; Width 222 mm; Height 225 mm

Terminals..... + \ -

Electrolyte..... Sulphuric acid 1,29 gr/lit 30°C

Recipient..... Polypropylene (PP)

Weight with electrolyte..... 51,4 Kg.

Suggested Charging current ..... 25 A WA 20 IU/A


Operating Temperature ..... -20°C / 45°C

Storage Temperature..... -20°C / 40°C

Cycles..... 1200

### Charging

Suggested Charging current	25A WA 20 IU1A
Operating Temperature	-20°C / 45°C
Storage Temperature	-20°C / 40°C
Cycle nr.	1200

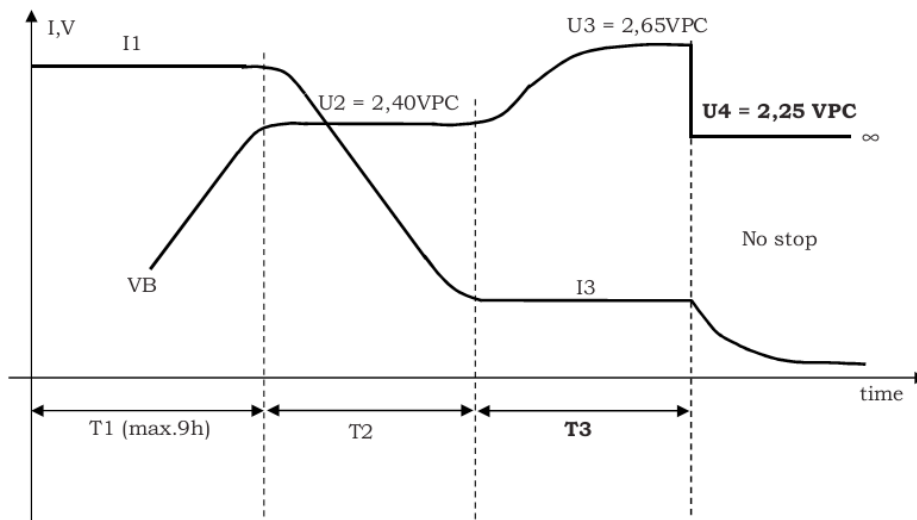

Duur: T1 + T2: De duur van de eerste twee fases is hoogstens 14u

Duur: T3: De duur T3 is gelijk aan de duur van de hoofdlading, dat is  $t_3 = t_1 + t_2$ , maar met een minimum van 1 tot 4h

T1 + T2 [h]	< 1	2	3	4	> 4
T3 [h]	1	2	3	4	4