

# TECHNICAL DATA SHEET

## PZS85

### Applications




**CYCLIC**



**SOLAR**



**MARINE**

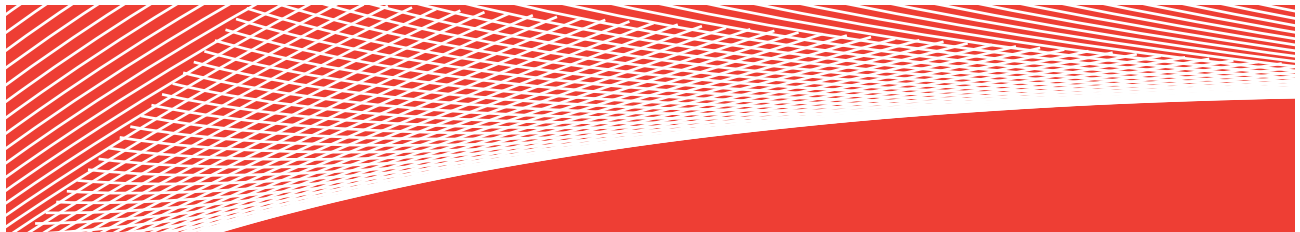

Nominal Voltage	.....	12 V					
Nominal Capacity	.....	20 h	⇒	110 Ah			
		5 h	⇒	85 Ah			
		2 h	⇒	66 Ah			
		10 h	⇒	100 Ah			
Internal Resistance	.....	milliohms					
Dimensions (mm)	.....	Lenght	308 mm	Width	175 mm	Height	225 mm
Terminals	.....	+ \ -					
Plates	.....	Positive : tubular armoured / Negative : pasted grid					
Electrolyte	.....	Sulphuric acid		1,29 gr/lit	30°C		
Recipient	.....	Polypropylene ( PP )					
Weight with electrolyte	.....	27,6 Kg.					
Suggested Charging current	.....	14 A	WA / 10A	IUIA			
Operating Temperature	.....	-20°C / 45°C					
Storage Temperature	.....	-20°C / 40°C					