

TECHNICAL DATA SHEET

PZS85

Applications




CYCLIC



SOLAR



MARINE

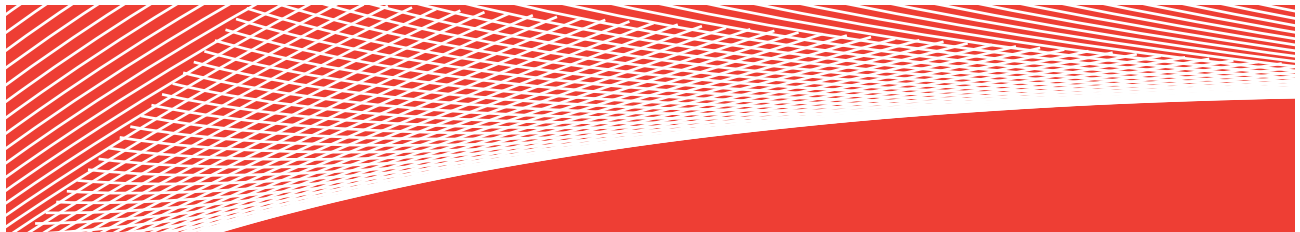

Nominal Voltage	12 V					
Nominal Capacity	20 h	⇒	110 Ah			
		5 h	⇒	85 Ah			
		2 h	⇒	66 Ah			
		10 h	⇒	100 Ah			
Internal Resistance	milliohms					
Dimensions (mm)	Lenght	308 mm	Width	175 mm	Height	225 mm
Terminals	+ \ -					
Plates	Positive : tubular armoured	/	Negative : pasted grid			
Electrolyte	Sulphuric acid		1,29 gr/lit	30°C		
Recipient	Polypropylene (PP)					
Weight with electrolyte	27,6 Kg.					
Suggested Charging current	14 A	WA / 10A	IUIA			
Operating Temperature	-20°C	/	45°C			
Storage Temperature	-20°C	/	40°C			